


Eco Logix®

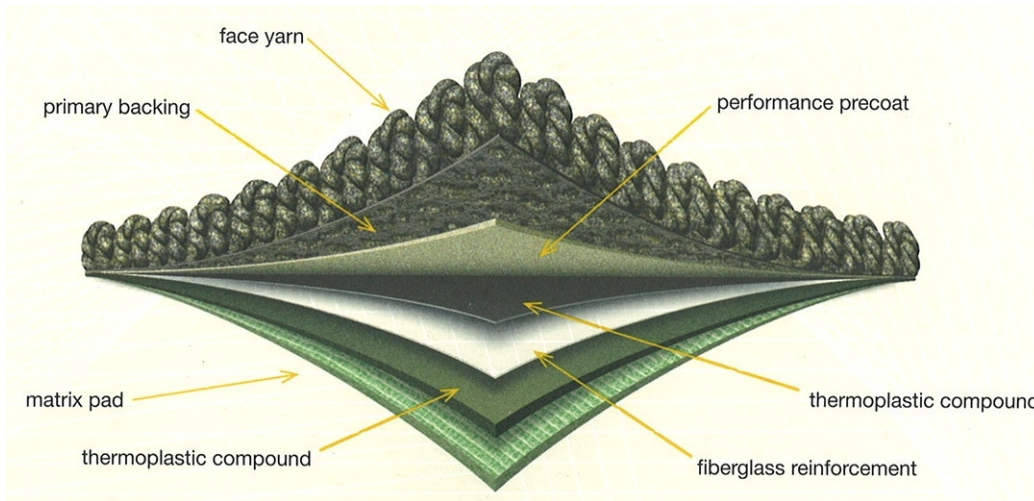

backing system

ecologix®

features and benefits

Performance precoat, fiberglass reinforced thermoplastic layer laminated with a fiber matrix secondary containing 88% post consumer material

backing process

6-step process

1. High performance precoat for maximum tuft bind and moisture resistance.
2. Thermoplastic laminate for superior delamination strength.
3. Fiberglass reinforcement for unmatched stability.
4. Thermoplastic laminate.
5. Attached post consumer recycled fiber matrix pad for comfort under foot.
6. Die-cut into carpet tile.

primary

Synthetic

stabilizer

Fiberglass Mat

weight

85 oz/sy

secondary thickness

.150 inch

dimensions

24" x 24" (standard); optional sizes available

pad density

8.5 – 9.5 lbs. per cubic foot

NBS Smoke < 450 (based on pile construction)
Passes CRI Green Label Plus Requirements
Moisture barrier – 24 hr. British Spill

installation

Full Spread Shaw Sureset N5000 Pressure Sensitive releasable adhesive
Apply with a 3/8 foam paint roller
Eco*Logix ES: Shaw's environmental self-adhesive system (custom option)

warranty

Lifetime Commercial

shawcontractgroup.com

To download details on installation, specifications, and warranties on-line

shaw inforum

call 1.877.502.7429 for personal assistance